

SAILSETC

Rigging Plan 190-kit Headsail Boom Kit – One Metre

also useful for 36"R class

2013

contents


400 mm SAILSetc boom section	-
bowsie	57c
sail eyelets x 2	78
'O' ring	82-010
hook	87b
plastic ball	88-005
headsail boom fitting, forward end, with 8 mm pan head screw	101d
headsail boom fitting, aft end	101f
boom track slide and clew hook	104a
sheet attachment, adjustable	104d
allen key	-

SAILSetc catalogue no

Graham & Lorna Bantock,
Fax +44 (0) 1376 571437
Telephone +44 (0) 1376 570583

141 High Street, Kelvedon, Essex, England. CO5 9AA
sales@sailsetc.com

© Graham Bantock, August 2013

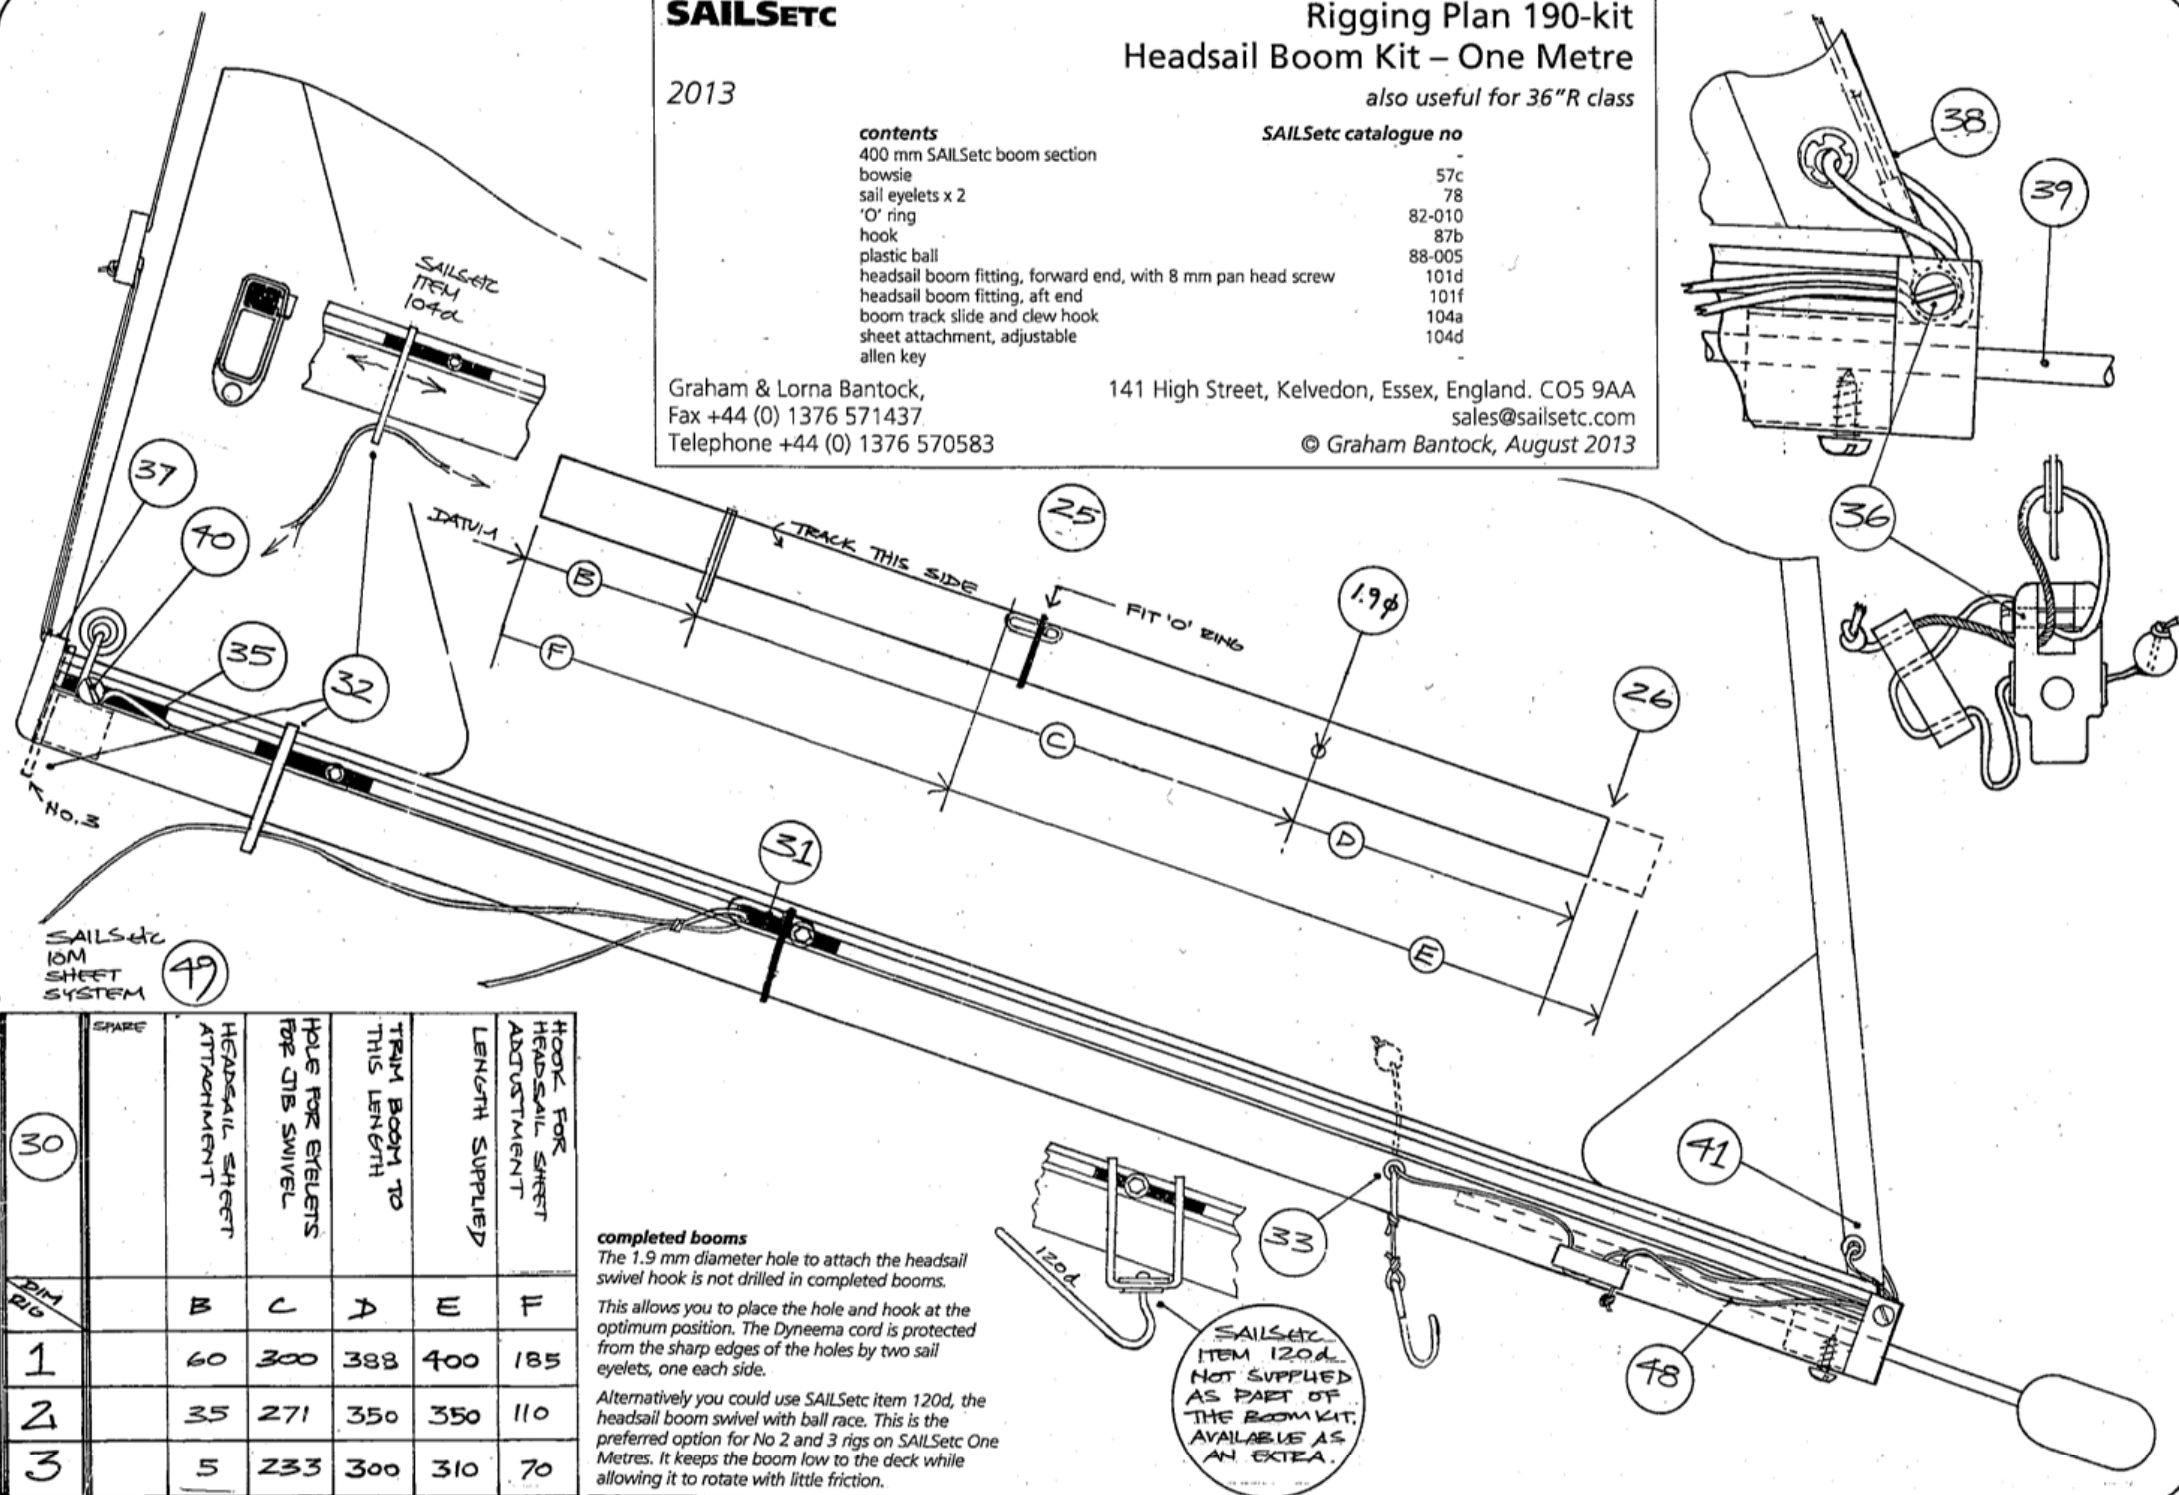

RIG	SPARE	HOOR FOR HEADSAIL SHEET ADJUSTMENT LENGTH SUPPLIED				
		B	C	D	E	F
1		60	300	388	400	185
2		35	271	350	350	110
3		5	233	300	310	70

completed booms
The 1.9 mm diameter hole to attach the headsail swivel hook is not drilled in completed booms.
This allows you to place the hole and hook at the optimum position. The Dyneema cord is protected from the sharp edges of the holes by two sail eyelets, one each side.
Alternatively you could use SAILSetc item 120d, the headsail boom swivel with ball race. This is the preferred option for No 2 and 3 rigs on SAILSetc One Metres. It keeps the boom low to the deck while allowing it to rotate with little friction.

SAILSETC ITEM 120d NOT SUPPLIED AS PART OF THE BOOM KIT. AVAILABLE AS AN EXTRA.